

## Coconut Waste as a Source for Biodiesel Production

Sarina Sulaiman<sup>+1,2</sup>, Abdul Aziz Abdul Raman<sup>1</sup> and Mohammed Kheireddine Aroua<sup>1</sup>

<sup>1</sup> Department of Chemical Engineering, Faculty of Engineering,  
University of Malaya, Kuala Lumpur

<sup>2</sup> Department of Chemical Engineering, Faculty of Engineering,  
International Islamic University of Malaysia, Kuala Lumpur  
Email:rin2207@yahoo.com

**Abstract**—Biodiesel industry needs a cheaper and economical viable raw material that can replace the currently used vegetable oil. Obtaining cheaper raw materials are one of the continuous targets of many biodiesel producing facilities since 70 to 95 % of the production costs are attributed to raw materials. One of the main options is to use waste material from animal and plant sources. In this study, coconut waste is used to produce biodiesel using methanol and KOH. The oil content in coconut waste varies from 10-11 wt%. The highest yield, 64 % is achieved with 5 wt% of KOH within 3 hr by mixing raw material and methanol.

**Keywords**-wastes; biodiesel; production; raw material; extraction.

### I. INTRODUCTION

Worldwide energy crisis due to depletion of resources and increased environmental problems has led to the search for an alternative fuel, which should be not only sustainable but also environment friendly. For developing countries, fuels of bio-origin, such as alcohol, vegetable oils, biomass, biogas, synthetic fuels are becoming important. Biodiesel derived from oil crops is a potential renewable and carbon neutral alternative to petroleum fuels. Technology for producing and using biodiesel has been known for more than 50 years. In the United States, biodiesel is produced mainly from soybeans. Other sources of commercial biodiesel feedstock includes sun flower oil [1, 2], animal fat [3], palm oil [4, 5], waste cooking oil [6, 7] and *Jatropha* oil [8, 9]. Even, okra [10], *Moringa* [1], *jojoba* oil, castor oil and sesame oil [11] are used to produce biodiesel.

However, biodiesel from oil crops cannot realistically satisfy the existing demand for transport fuels and the price of vegetable oil is hiking as well. The high cost in production of biodiesel has become the major obstacle and the use of vegetable oil as raw material is competing with edible oils. Obtaining cheaper raw materials are one of the continuous targets of many biodiesel producing facilities since 70 to 95% of the production costs are attributed to raw materials [12]. One of the main options is to use waste material from animal and plant sources. There are few types of wastes used as raw materials in biodiesel production includes, waste bleaching earth, fryer grease oil/waste cooking oil, discarded marine parts, spent coffee ground and sludge. Waste lard and waste cooking oil contains the highest oil and is abundant and cheap. Table 1 shows the summary of oil content, type

of catalyst, advantages and disadvantages of wastes for biodiesel production.

In Malaysia, the mostly available and accepted raw material for biodiesel production is palm oil. Other wastes, either waste oil or animal fats is not fully commercialized if compared to other countries. The reason is because low availability of waste and the waste collection is not fully exploited and are more scattered. The price of palm oil is far cheaper if compared to other raw materials and this become the main reason of lack of development of other raw material. However it is reported that 60 tons of waste vegetable oil are converted to biodiesel by Intrack Technology Sdn. Bhd, from Rawang in 2009. This company is looking forward into more research and improvement in the biodiesel before commercialization their biodiesel. Malaysia needs more development in the production of biodiesel by not only depending on the palm oil as the main raw material but to other raw material especially wastes in order to compete with other countries. There are abundant of waste cooking oil, fats and other vegetable wastes that can be fully utilized as cheap feedstock. To date, it is claimed that only Grand Inizio Sdn Bhd. has develop multi-feedstock biodiesel technology in January 2009 [13]. Lam MK, et al., 2010 reported that 0.5 tonne million/year of waste cooking oil is produced in Malaysia.

In these studies, the waste from coconut industries is used as the feedstock. In Malaysia estimated 3960 metric tons of coconut waste is being generated of which majority are from coconut oil waste and being used as fertilizer or to feed the cows or left to decompose on the fields. Typically coconut may still contain 10-15% extractable oil content and the FAME compositions are C<sub>8</sub> to C<sub>12</sub>. This forms the justification of this work where methyl ester will be produced by directly subjecting the coconut waste with methanol and catalyst, KOH. This study is conducted to determine the optimum reaction time and catalyst loading to produce the highest yield of biodiesel using in situ production.

### II. MATERIAL AND METHOD

#### A. Drying

Coconut waste is dried overnight at 50°C. After drying, the coconut is kept in dry cabinet for further usage.

### B. Extraction

Coconut waste is grinded to fine powder using grinder. All the experiment is carried out in 150mL soxhlet extractor. Coconut is weighted and put into a thimble. The thimble is then put into the soxhlet distillation chamber and the extraction process is conducted for 5 hr. Hexane is used to separate the oil from the waste. .

### C. Insitu Production


In situ production reactions are performed in 150ml jacketed batch reactor. The temperature is controlled by the water bath. The reaction is conducted at 50°C. Coconut residue is mixed with methanol and KOH in the vessel for 5 hr. Finally, the oil and glycerin is separated using funnel. The oil is washed with warm water (45-50°C).

### D. Analysis

The biodiesel composition is analyzed using GC 6810. The 0.1 mL of sample is diluted with 3.9mL of n-hexane and 1  $\mu$ L of sample is injected into DB 23 column. The standard mixture of fatty acid is bought from Sigma.

## III. RESULTS AND DISCUSSION

Extraction of oil is carried out using n-hexane as the solvent. The oil yield varies slightly during the extraction of coconut residue. The yield of oil averaged 10 to 10.5 wt%. This shows that even after the extraction of milk, there is 10 wt% of oil in the residue.

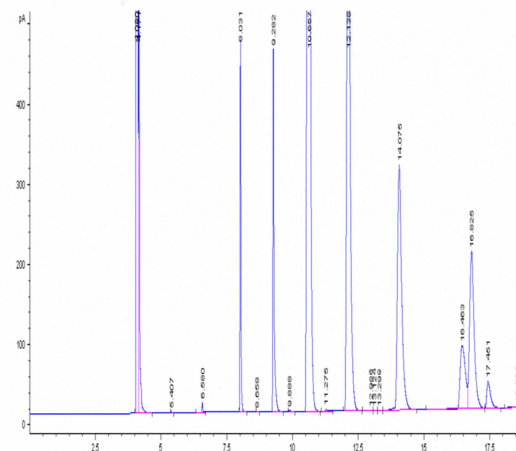

#### IV. CONCLUSION

Coconut waste is a promising raw material that is cheap and abundant. There is 10-10.5 wt% of oil in coconut waste after the coconut milk extraction. The highest yield, 64 % is achieved at 3hr with 5 wt% of catalyst. However, using hexane as a co-solvent increases the yield of biodiesel. The finding shows that in situ production eliminates the need to extract the oil and helps in cost reduction in production of biodiesel. In future, heterogeneous or acid catalyst can be used in order to achieve a higher yield.

#### ACKNOWLEDGMENT

This research is funded by PPP grant (PS401/2010A) from IPPP, University of Malaya, Malaysia.

#### REFERENCES

- [1] U. Rashid, Anwar F, Moser BR, Ashraf S. Production of Sunflower Oil Methyl Esters By Optimized Alkali-Catalyzed Methanolysis. *Biomass and Bioenergy* (2008), Doi:10.1016/j.biombioe.2008.03.001.
- [2] Sarin R, Malhotra RK, Et Al., Jatropha–Palm: Biodiesel Blends: An Optimum Mix for Asia, *Fuel* 86 (2007) 1365–1371.
- [3] H.N. Bhatti, M A Hanif , M Qasim, A-u. Rehman. Biodiesel Production from Waste Tallow, *Fuel* 87 (2008), 2961–2966.
- [4] O.J. Alamu, M.A. Waheed, S.O. Jekayinfa. Effect Of Ethanol–Palm Kernel Oil Ratio On Alkali-Catalyzed Biodiesel Yield, *Fuel* 87 (2008) 1529–1533.
- [5] M. Aresta, Angela Dibenedetto, Maria Carone, Teresa Colonna, Carlo Fragale. Production of Biodiesel from Macroalgae by Supercritical CO<sub>2</sub> Extraction and Thermochemical Liquefaction, *Environ Chem Lett* 3 (2005) 136–139.
- [6] J.M. Encinar , J.F. González, A. Rodríguez-Reinares. Ethanolysis of Used Frying Oil. Biodiesel Preparation And Characterization, *Fuel Processing Technology* 88 (2007) 513–522.
- [7] M. M. Soumanou and Uwe T. Bornscheuer. Improvement in Lipase-Catalyzed Synthesis of Fatty Acid Methyl Esters from Sunflower Oil, *Enzyme and Microbial Technology* 33 (2003) 97–103.
- [8] S.Shah and M. N. Gupta. Lipase Catalyzed Preparation of Biodiesel from Jatropha Oil in A Solvent Free System, *Process Biochemistry* 42 (2007) 409–414.
- [9] A.V. Tomasevic and S.S. Siler-Marinkovic. Methanolysis Of Used Frying Oil, *Fuel Processing Technology* 81 (2003) 1 – 6.
- [10] F. Anwar, U. Rashid, M. Ashraf and M. Nadeem. Okra (*Hibiscus esculentus*) seed oil for biodiesel production, *Applied Energy*, 87, Issue 3 (2010) 779-785.
- [11] Karmakar, A., et al. Properties of various plants and animals feedstocks for biodiesel production. *Bioresour. Technol.* (2010), doi:10.1016/j.biortech.2010.04.079.
- [12] Y. Zhang, M.A. Dub, D.D. McLean, M. Kates. Biodiesel production from waste cooking oil: 2. Economic assessment and sensitivity analysis, *Bioresource Technology* 90 (2003) 229–240.
- [13] S. Lim, L.K. Teong. Recent trends, opportunities and challenges of biodiesel in Malaysia: An overview, *Renewable and Sustainable Energy Reviews* 14 (2010) 938–954
- [14] Lam M. K, Lee K. T. Lee, A.R.Mohamed. Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: A review, *Biotechnol Adv* (2010), doi:10.1016/j.biotechadv.2010.03.002.
- [15] K-H. Chung, J. Kim, K-Y. Lee. Biodiesel Production By Transesterification Of Duck Tallow With Methanol On Alkali Catalysts, *Biomass And Bioenergy* 33 (2009)155–158.